

# MARINE PRODUCT DATA SHEET

OEM: 357-111-00 (700 GPH) AFTERMARKET: 357-111-10 (700 GPH)

Everything you are looking for in a bilge pump. Our tough, high density nylon housing and heavy duty water cooled motor gives the SHURflo Bilge Pump unparalleled reliability. Installations are a snap with our unique swivel baseplate and extended 6' tinned wire and assembly. Easy installation and removable cartridge for easy cleaning.

# **TYPICAL APPLICATIONS**

12V Marine Bilge Water Evacuation. For other applications, Contact SHURflo.

#### **PUMP**

Type: Centrifugal Pump

Port: 3/4" Barb

Liquid: 130 °F [54 °C] Max Prime: Flooded Inlet

Run Dry: No

## **ELECTRICAL**

Motor: 12VDC Permanent Magnet, Continuous Duty

Protection: External Fuse

Leads: 6 ft (1.8M) Tinned, 16 AWG Fuse: 5 Amp Recommended

Control: No Control

# **MATERIALS**

Housing: High Strength Nylon Impeller: High Strength Nylon Hardware: Stainless Steel

# **APPROVALS**

Ignition Protected, CE, ISO 8846

#### **WARRANTY**

3 Year Limited Warranty See SB-1050 For Full Warranty Details

## **SHIPPING**

Net Weight (Boxed): 1.25 Lb (0.56 Kg) each

Carton Weight: 30 Lb [13.6 Kg]

Pumps in Carton: 24

Carton Size: 24"L x 18"W x 11" H [61 cm x 46 cm x 28 cm]

# RELATED DOCUMENTS

Catalog: MS-030-140
Installation Manual: 911-593-00
Maintenance: 911-593-00
Applications Spec Guide: MS-020-005
Warranty: SB-1050







PDS 357-111-00 Rev. 11/06 June 2003

# PERFORMANCE @ 13.6V DC

PRESSURE		FLOW		CURRENT
METERS	FT OF HEAD	GPH	LPH	AMPS
0.0	0	726	2747	3.90
1.20	4	631	2388	3.86
2.40	8	458	1733	3.70

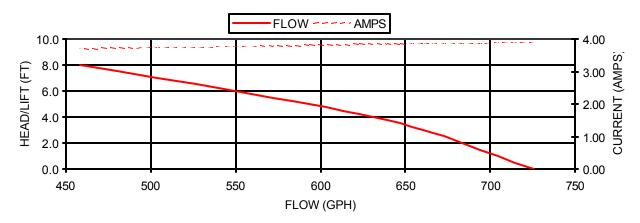

# **DIMENSIONS** [mm]

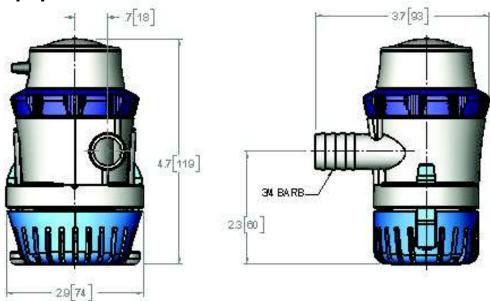



\*ISO Registered Facility

SHURflo reserves the right to update specifications, prices, or make substitutions.

SHURflo \* 5900A Katella Ave. Cypress, Ca. 90630 (800) 854-3218 (562) 795-5200 FAX (562) 795-7554 Shipping/UPS: 5900C Katella Ave. Cypress, Ca. 90630

SHURflo East 52748 Park Six Court Elkhart, IN 46514-5427 (800) 762-809 (574) 262-0478 FAX (574) 264-2169 Http://www.shurflo.com

United Kingdom +44 1293 424000 FAX +44 1293 421880



PDS 357-111-00 Rev. 11/06 June 2003